





[図1]

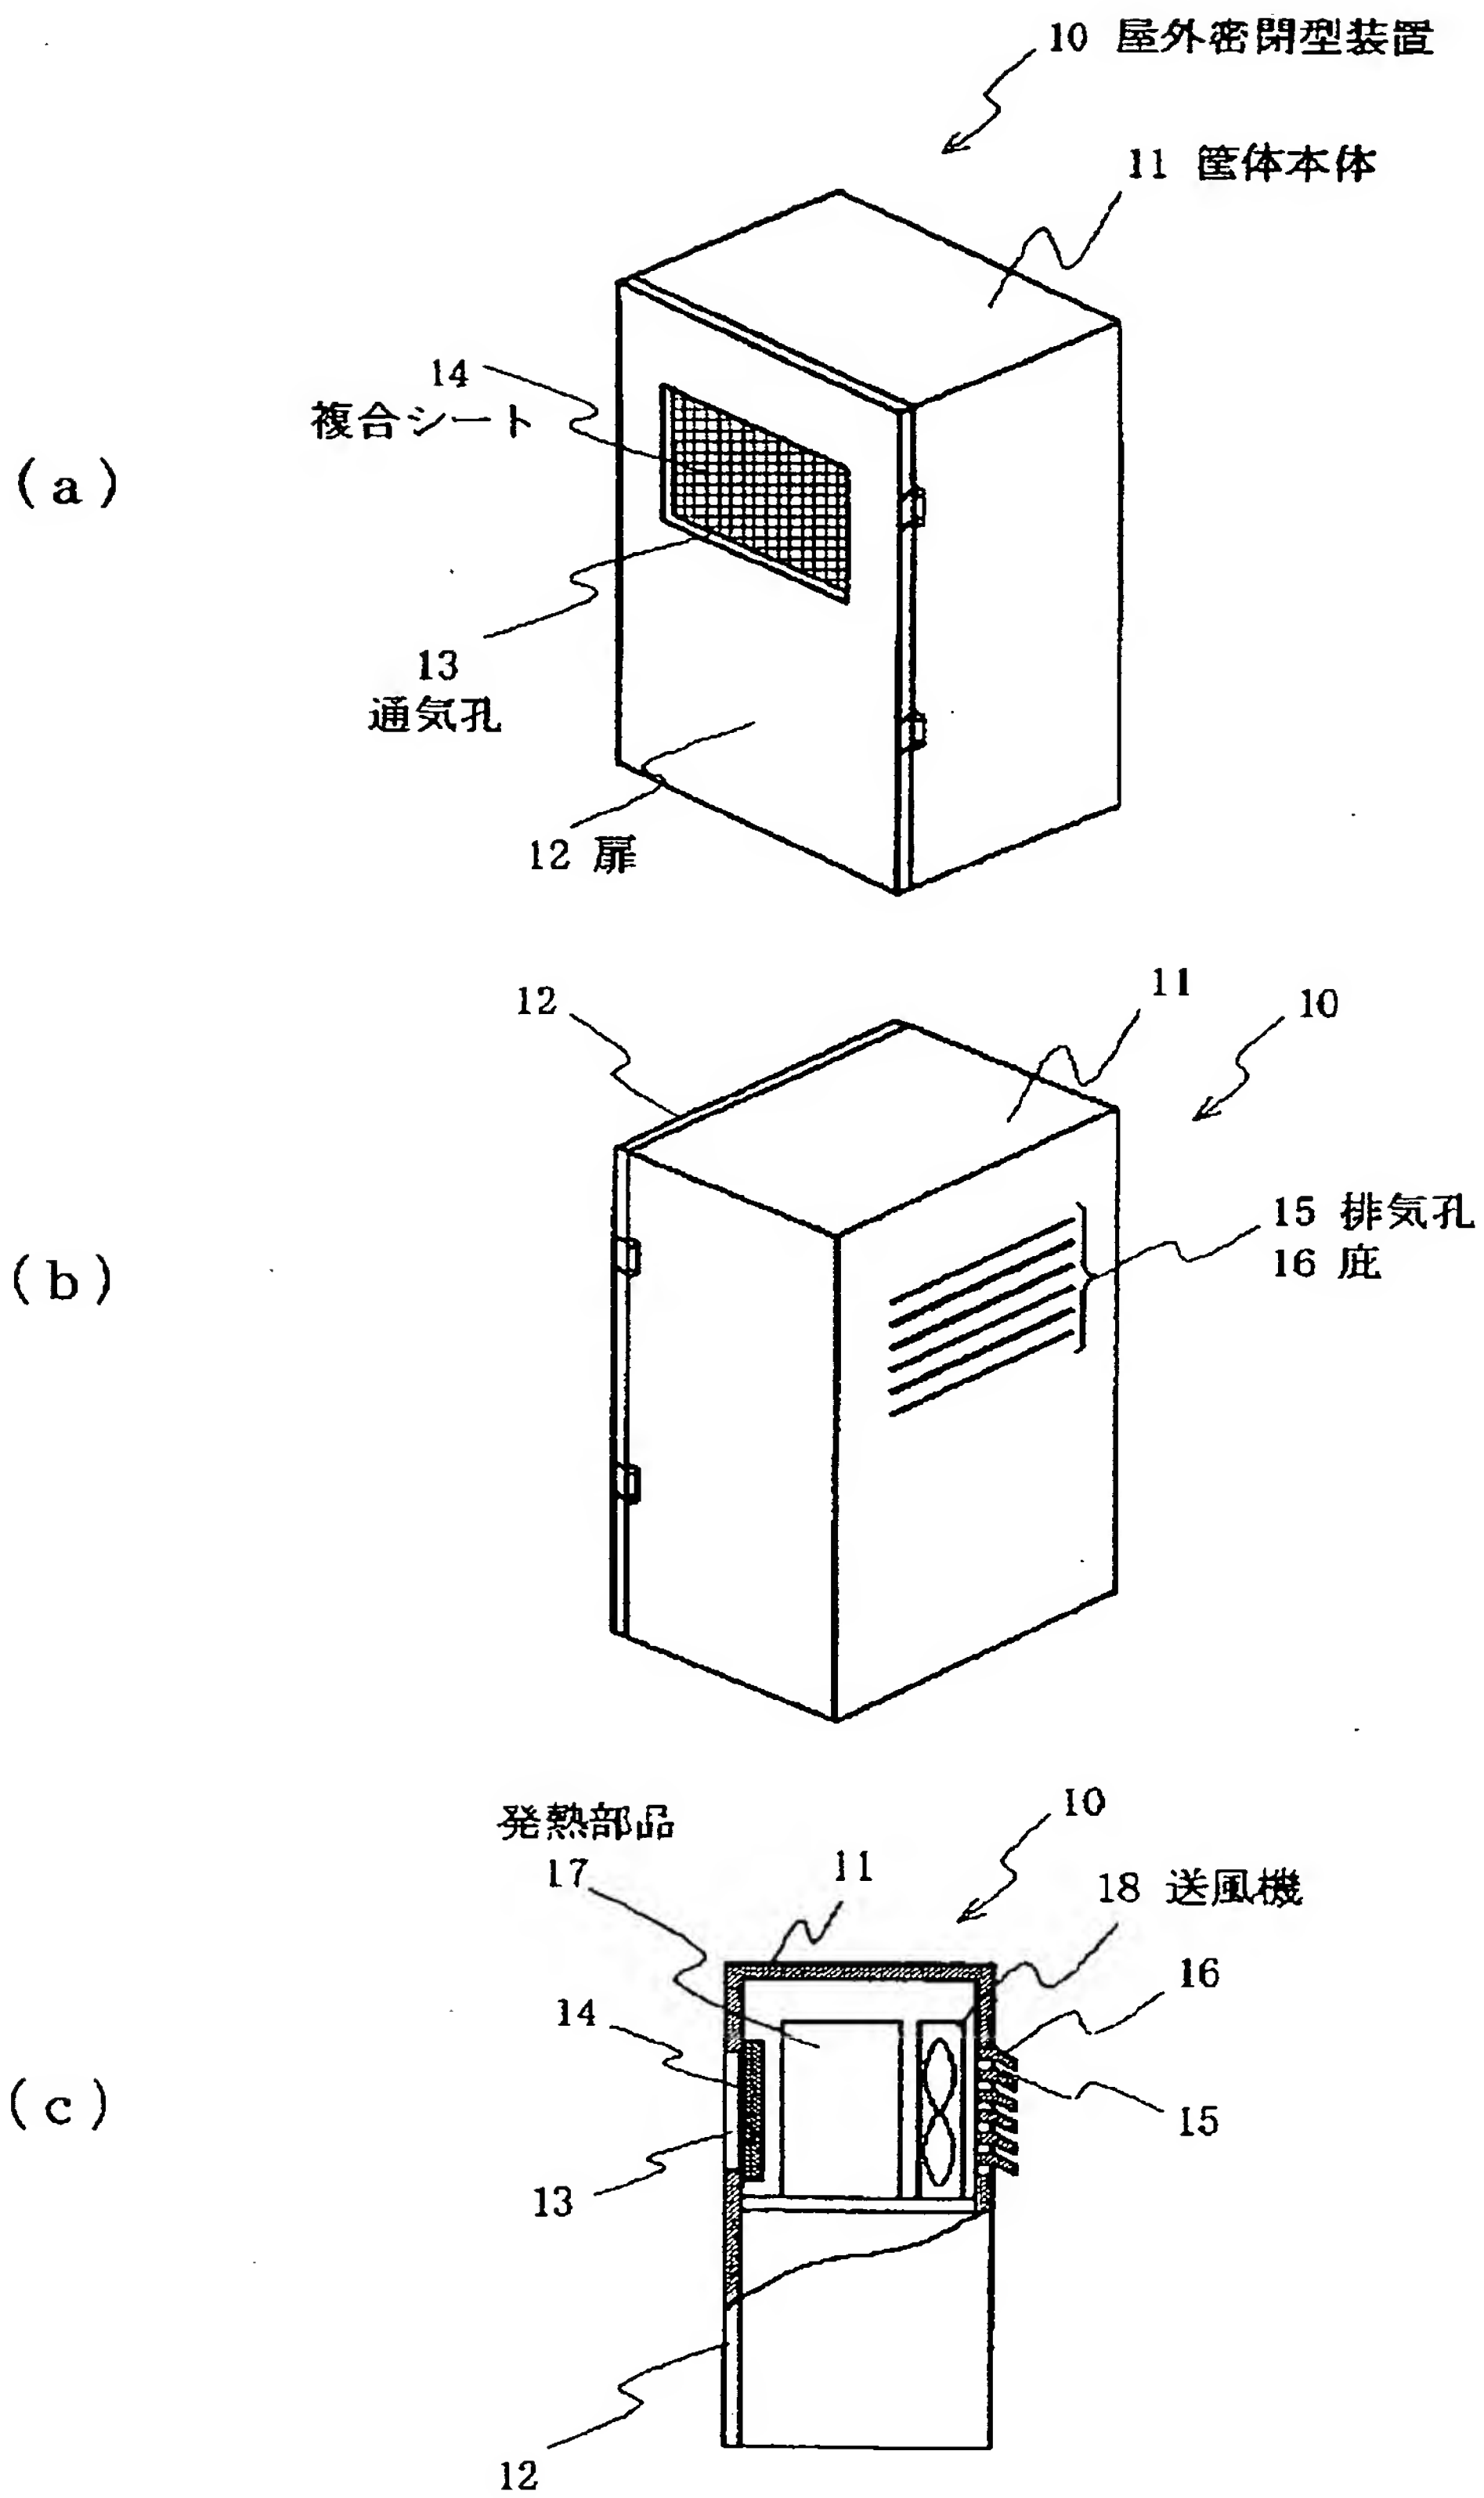

[図2]

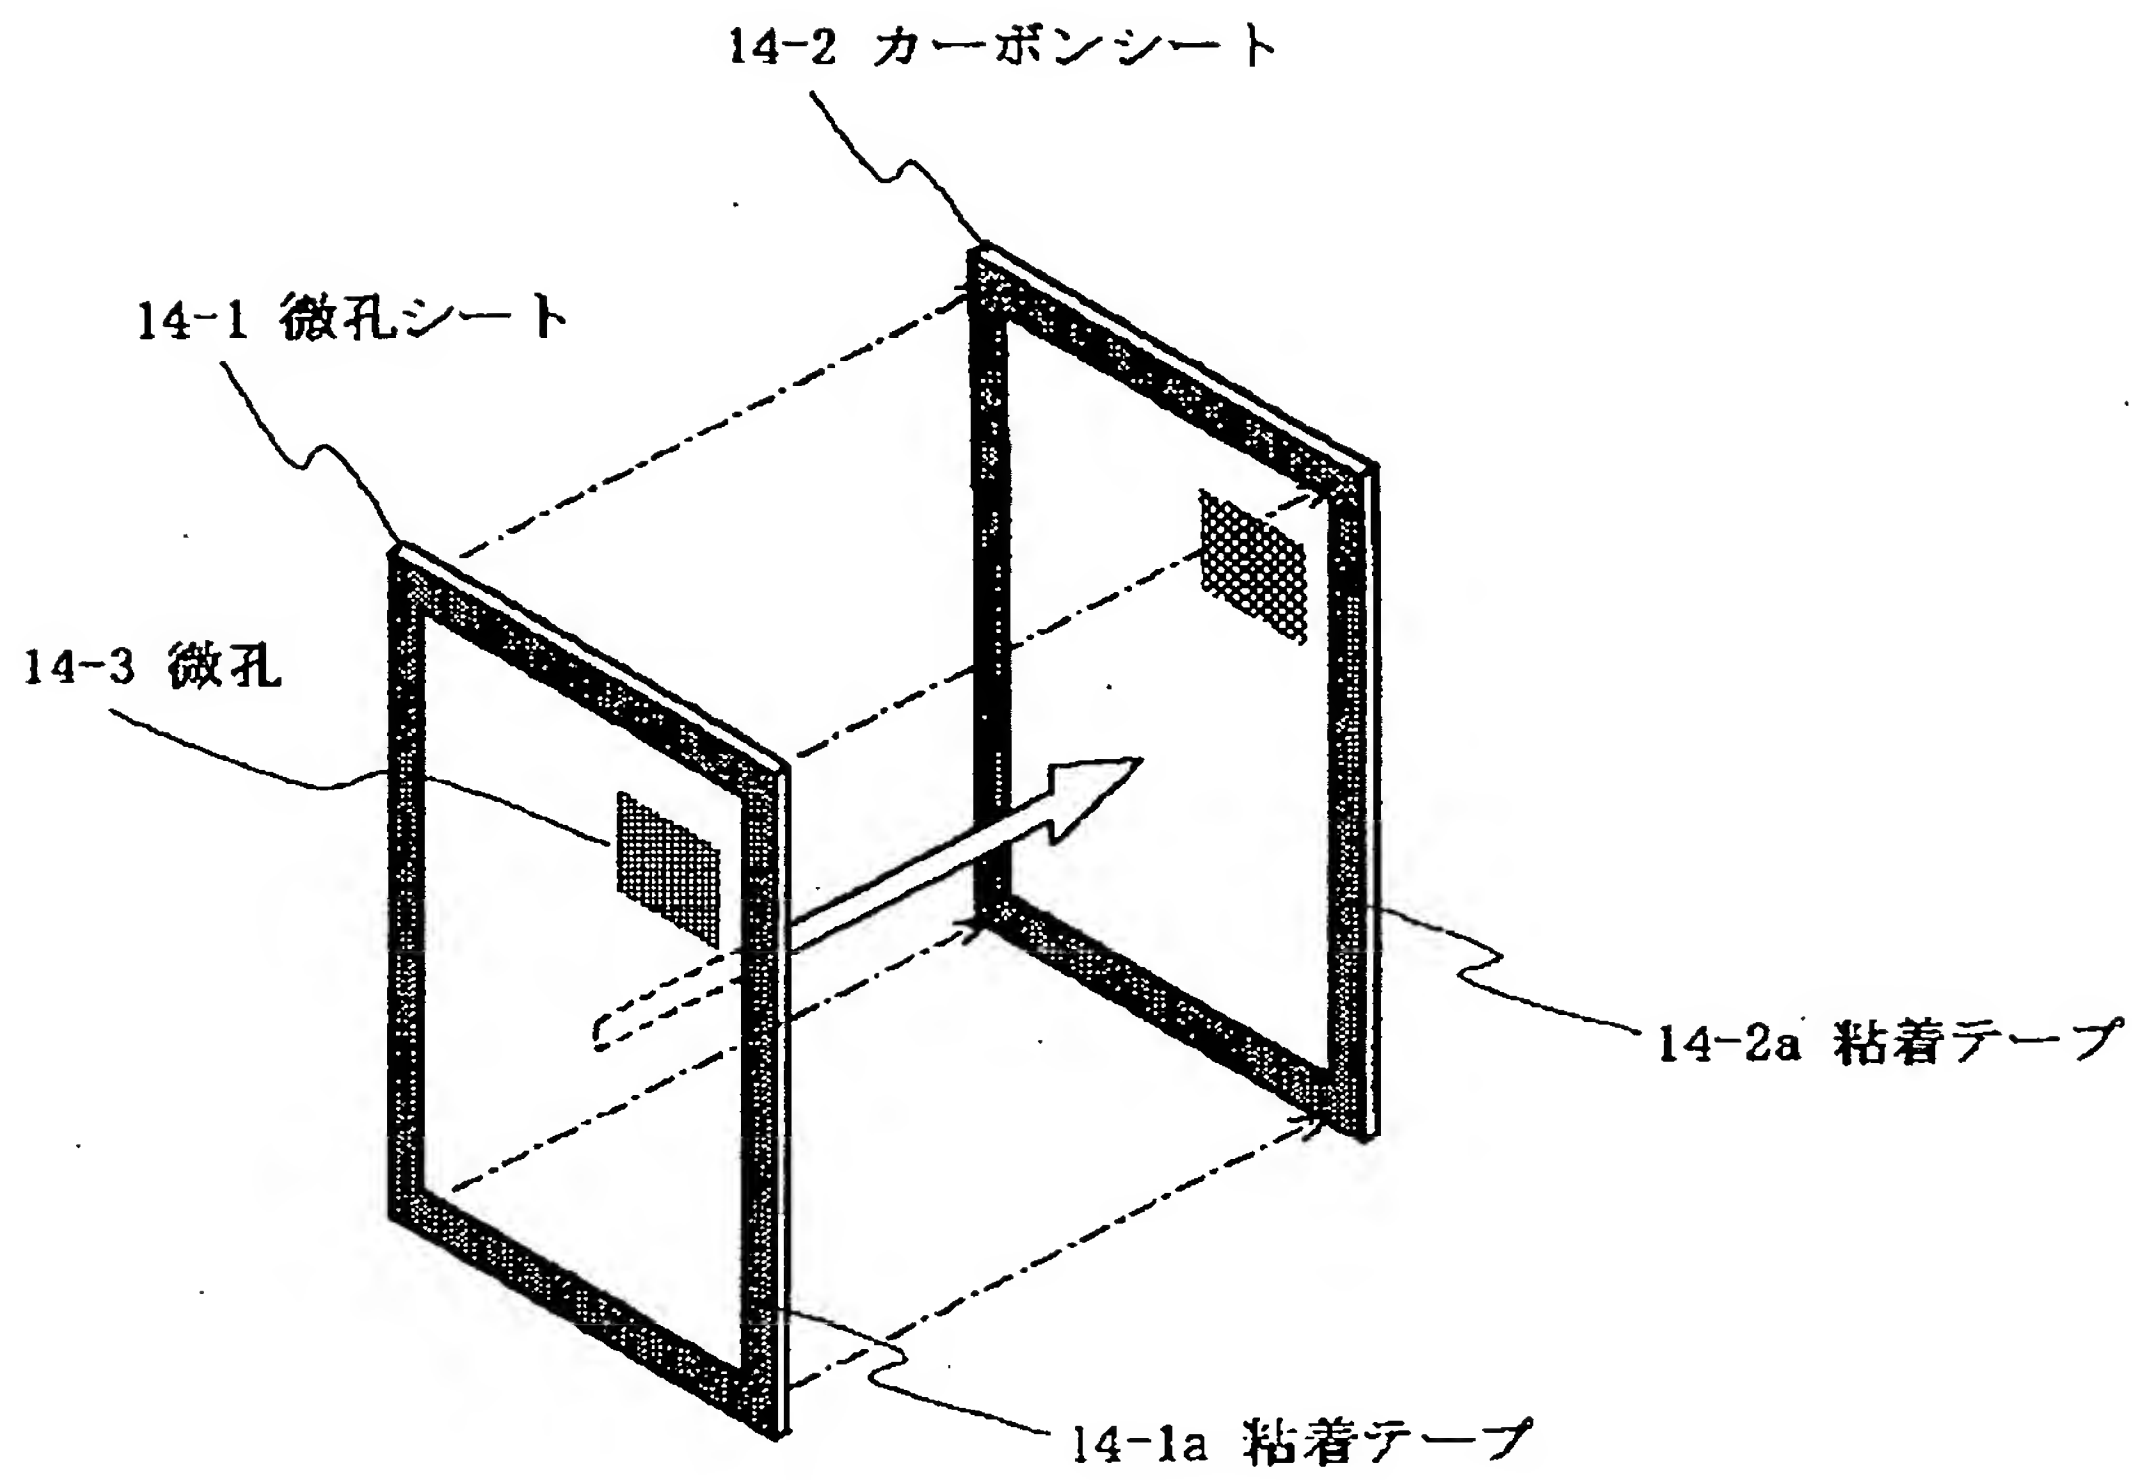


[図3]

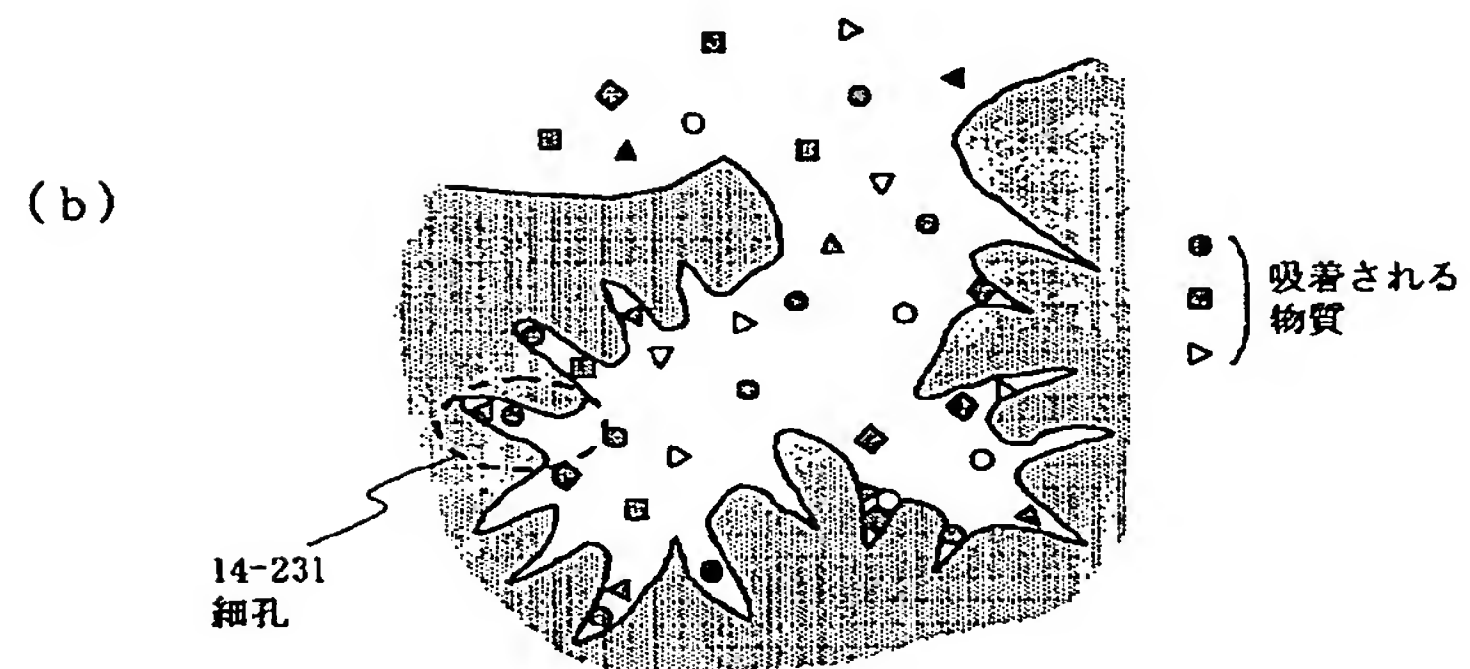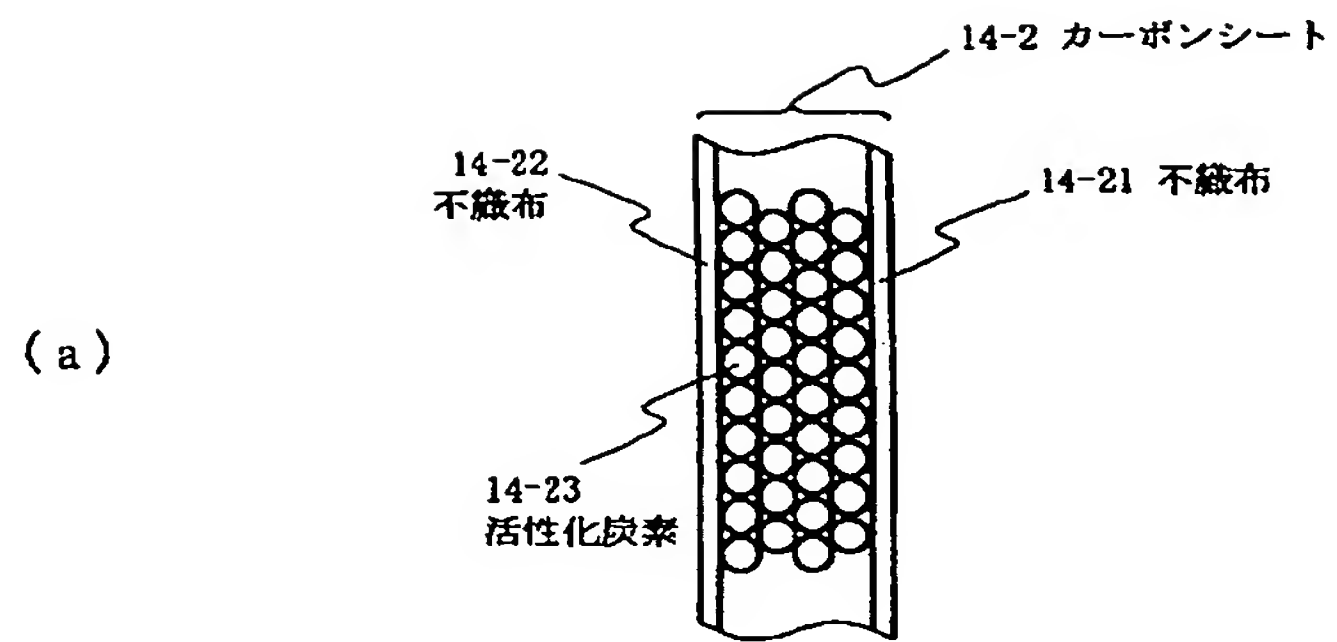

[図4]

装着箇所	評価	通気度		耐水圧 (kPa)
		測定時通気孔直径 (mm)	ガーレー換算値 (sec)	
蓋部	初期	8	14.3	182
	試験後	8	14.2	182
本体	初期	8	13.4	166
	試験後	8	13.3	166

[図5]

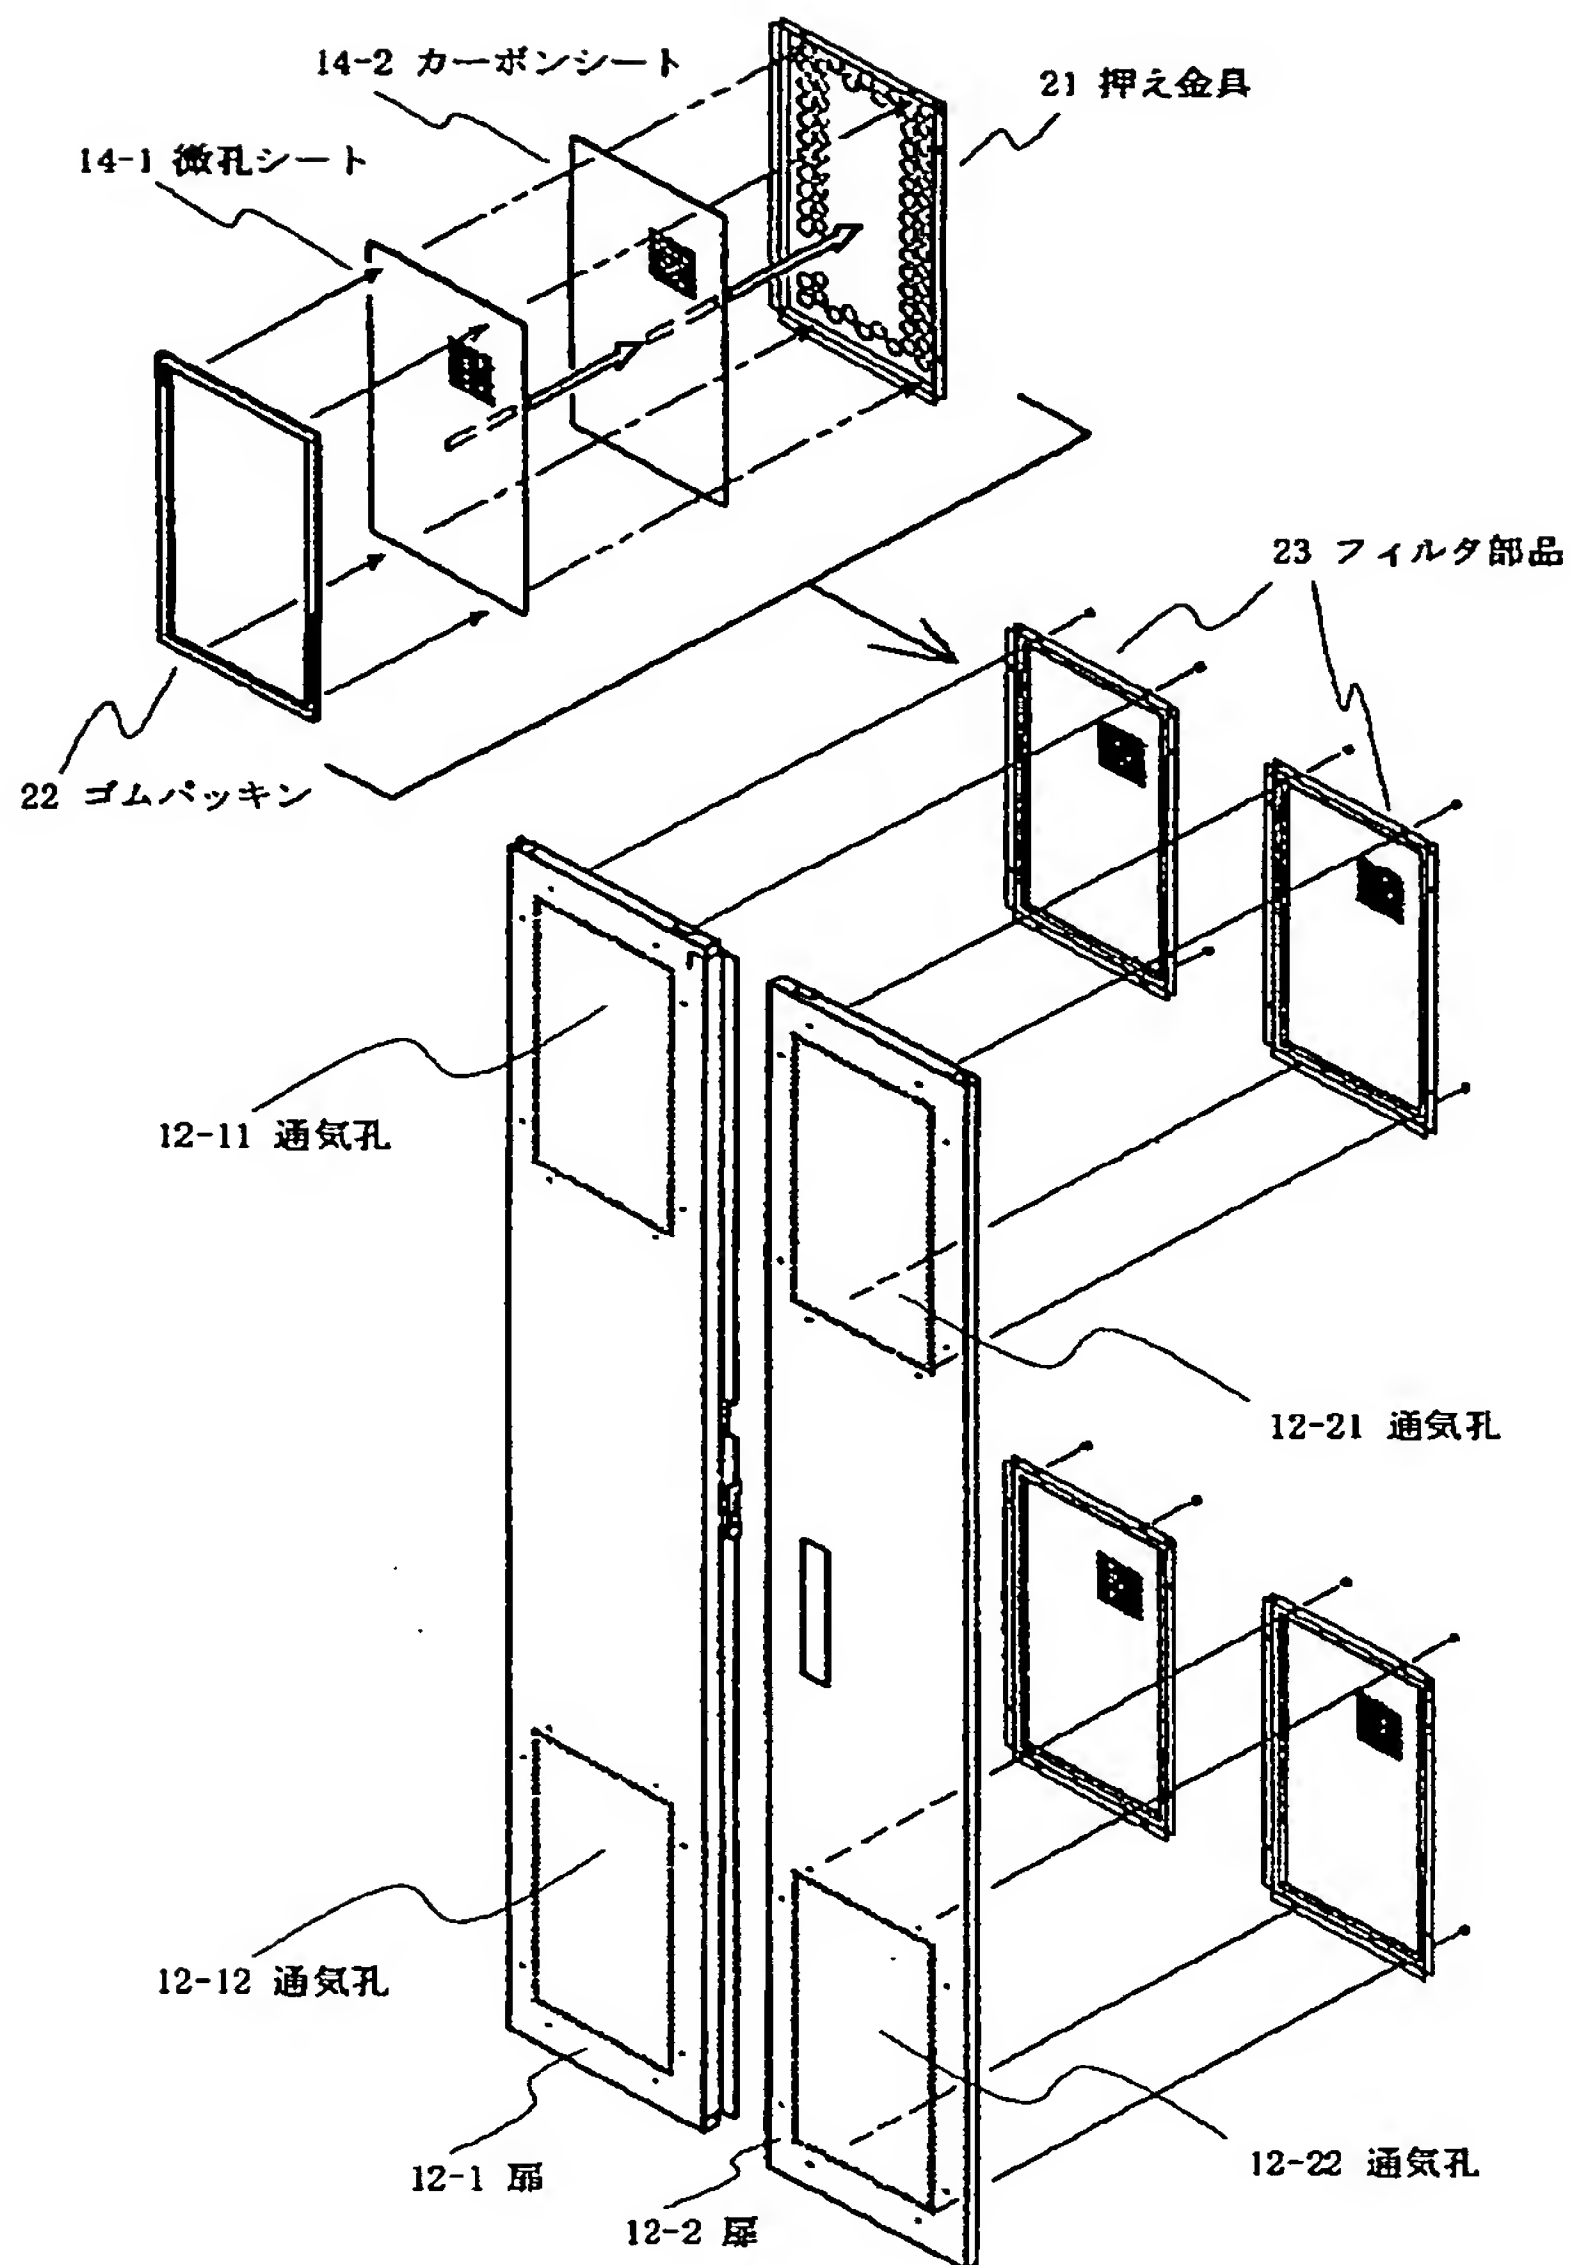

[図6]

